



Lasts twice as long, period.*



MR 5-30 Fuel Meter

* This meter has two times the life of the industry standard for mechanical fuel meters.



MR 5-30 Fuel Meter

UL Listed Meter to US and Canadian Standards


Choose the MR 5-30 when you need to meter petroleum fuels. This aluminum meter is perfect for use with gasoline (alcohol blends up to E15), diesel fuel and kerosene. Designed for high volume pumps.

SPECIFICATIONS

Unit of Measure:	U.S. Gallon	Litre	
Flow Range:	5 to 30 GPM	19 to 114 LPM	
Typical Accuracy:	± 2%	± 2%	Note: Accuracy is factory calibrated for diesel fuel. Field Calibration is available on all models.
Type:	Nutating Disc	Nutating Disc	
Housing Material:	Aluminum	Aluminum	
Maximum Working Pressure:	50 PSIG	3.4 bar	
Inlet/Outlet Fitting Size:	3/4", 1" or 1-1/2"	3/4", 1" or 1-1/2"	
Threads:	NPT	NPT or BSPP	UL LISTING ONLY APPLIES TO MODELS WITH NPT THREADS
Maximum Batch Total:	999.9	9,999	
Maximum Cumulative Total:	999,999.9	9,999,999	



FEATURES

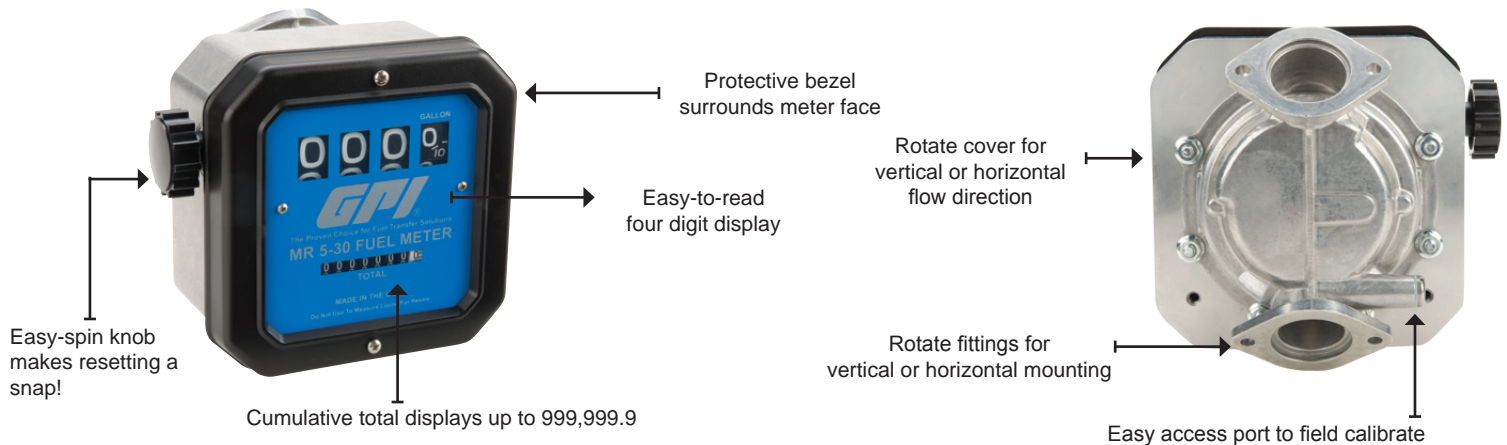

MODELS INCLUDE:

126300-01 - Calibrated in gallons with 3/4 inch NPT fittings	126300-02 - Calibrated in litres with 3/4 inch NPT fittings	126300-07 - Calibrated in litres with 3/4" BSPP fittings
126300-03 - Calibrated in gallons with 1 inch NPT fittings	126300-04 - Calibrated in litres with 1 inch NPT fittings	126300-08 - Calibrated in litres with 1" BSPP fittings
126300-05 - Calibrated in gallons with 1-1/2 inch NPT fittings	126300-06 - Calibrated in litres with 1-1/2 inch NPT fittings	126300-09 - Calibrated in litres with 1-1/2" BSPP fittings

For more information visit www.gpipumps.net, or contact us at 800-835-0113 or 316-686-7361.