

**TRIANGLE TYPE**




**SPECIFICATION**


Size	DN 3 - 15
Material	Head Epoxy Coated Aluminium Body : Tube SS316L, House SS304
	Flange SS304
Temperature	(-50) - 200c
Pressure	4,0 Mpa
Power Supply	24 VDC
Output	Pulse, 4-20 mA, RS 485
Protection Grade	IP 67
Connection	Flange PN16
Accuracy	0.2 %
Measurement Density	0.3-3000 g/cm3
Repeatability	0.1-0.2%
Explosion Proof	Exd(ia) IIC T6Gb
Exida & TUV SIL2 / SIL3 Certified	
Warranty 2 Years ( Full Service & Spare Parts)	

**APPLICATION**

Crude Oil, Coal Slurry, Lubricant, Asphalt, Heavy Oil, Grease, Cement Slurry, Lime Slurry, High Pressure Gas, High Viscosity Fluids.

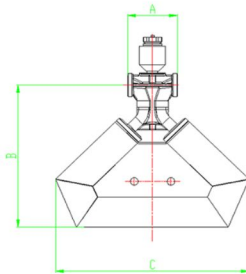

SEPARATED

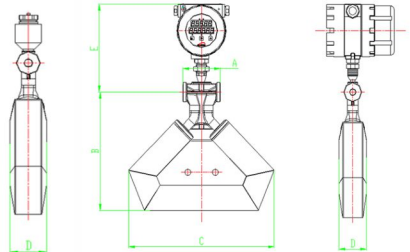

INTEGRATED

**TECHNICAL DATA**

SIZE		FLOW RANGE (kg/h)	ZERO STABILITY(kg/h)		DIMENSION (mm)				WEIGHT (kg)
DN (mm)	INCH		0.2%	0.1%	L	B	H INTEGRATED	H SEPARATED	
DN 3	1/8"	0-96-120	0.018	0.012	250	54	420	176	8
DN 6	1/4"	0-540-660	0.099	0.066	360	70.5	550	263	12
DN 8	5/16"	0-9600-1200	0.18	0.12	395	70.5	565	275	12
DN 10	3/8"	0-1500-1800	0.27	0.18	370	70.5	525	283	11
DN 15	1/2"	0-3000-4200	0.63	0.42	405	70.5	544	302	12